



Dish Mount Products, L.L.C.

P.O. Box 81183

Lafayette, La. 70598


Ph. # 337-261-3177 Fax: 337-261-2689

Dish Mount AF-600 Angled Fascia Plate

AF-600 Angled Fascia Mount Kit

U.S. Patent Pending

Thank you for your purchase of the Dish Mount Products AF-600 Angled Fascia Mount Kit! This product was designed to provide you with a simple way to mount your satellite dish with a high level of technical accuracy while providing an aesthetically pleasing installation. Please be sure to review these installation instructions thoroughly before you begin your installation.

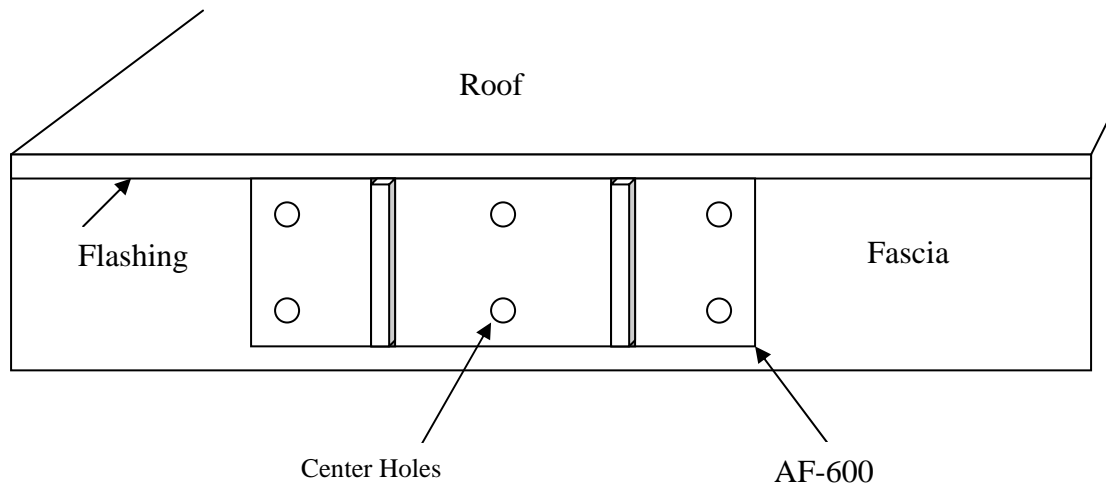

DANGER: You can be killed or seriously injured if the mast, dish or any part of your body comes into contact With electric power lines! Verify that there are none nearby before performing the following installation.

Determine the best location on the structure where the dish will need to be mounted and proceed to the following steps.

Step 1: Locate the end of the roof rafter behind the fascia board. Mark the centerline of the roof rafter on the fascia board.

Step 2: Position the Angled Fascia mounting plate on the fascia board just below the roof flashing. The center holes in the mounting plate must be placed over the centerline of the roof rafter previously marked on the fascia board. Place a level on the side of the mounting plate. After the mounting plate has been leveled, mark the six mounting holes on the fascia board.

Step 3: Drill a pilot hole on each of the marked mounting holes using a 5/32" drill bit.

Step 4: Position the Angled Fascia mounting plate over the mounting location. Using the lag bolts and washers supplied, thread the lag bolts into the previously drilled pilot holes and tighten.

Step 5: Using the remaining Carriage bolts that are supplied with the Angled Fascia mounting kit, attach the arm or mast to the Angled Fascia plate. The installation of the AF-600 Angled Fascia Mount is now complete.

Note: When using certain DirecTV dishes, you may use the bolts supplied with the dish to attach the Arm or mast to the Angled Fascia Mount

TOOLS REQUIRED

Bubble Level
Pencil

Electric Drill
5/32" Drill Bit

1/2" & 7/16" Open
Socket & Open
End Wrench

CONTENTS & HARDWARE INCLUDED

AF-600 Angled Fascia Mount

Hardware for the AF-600 Angled Fascia Mount:

- (6) 5/16" x 3" grade 5 lag bolts
- (6) 5/16" x 3" flat washers

Hardware for attaching the dish mast to the AF-600 Angled Fascia Mount:

- (2) 1/4" x 1 1/2" carriage head bolts
- (2) 1/4" flat washers
- (3) 1/4" nuts

Technical Support: After reading these installation instructions, if you are still unsure how to properly install this product, please contact us at 337-261-3177 Monday thru Friday, 9:00AM to 5:00PM CST.

Disclaimer: Local building and electrical codes will take precedence to the installation instructions of this product. Proper grounding of the satellite antenna and coaxial cables is also required by local building and electrical codes.

Warranty: The Dish Mount AF-600 Angled Fascia Mount carries a lifetime warranty. Dish Mount Products LL.C. Will replace without charge a product that proves to be defective in materials or workmanship. This warranty does not include malfunction caused by incorrect installation. This warranty excludes all incidental or consequential damages.