



Dish Mount Products, L.L.C.  
P.O. Box 81183  
Lafayette, LA 70598  
Phone: 337-261-3177 Fax: 337-261-2689

# Dish Mount FM-400 Fascia Mount Plate

Thank you for your purchase of the Dish Mount FM-400 Fascia Mount Plate! This product was designed to provide you with a simple way to mount your satellite dish with a high level of technical accuracy while providing an aesthetically pleasing installation. Please be sure to review these installation instructions thoroughly before you begin your installation.

## Hip Type Roof Installation Instructions

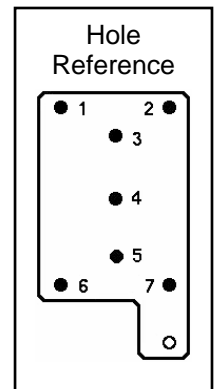
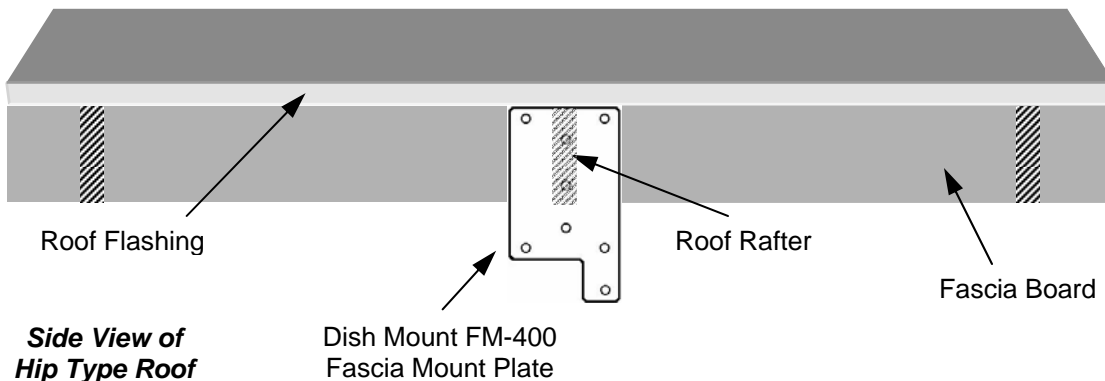


Figure 2

**DANGER:** You can be killed or seriously injured if the mast, dish, or any part of your body comes into contact with electric power lines! Verify that there are none nearby before performing the following installation!

Determine the best location on the structure where the dish will need to be mounted and proceed to the following steps.

**Step 1:** Locate the end of the roof rafter behind the fascia board. Mark the centerline of the roof rafter on the fascia board.

**Step 2:** Position the mounting plate on the fascia board just below the roof flashing. The center holes in the mounting plate, holes 3, 4, and 5 (See Figure 2) must be placed over the centerline of the roof rafter previously marked on the fascia board. Place a level on the side of the mounting plate. After the mounting plate has been leveled, mark the mounting holes 1, 2, 3, 4, and 5 (See Figure 2) on the fascia board. Depending on the width of the fascia board, hole 5 (See Figure 2) on the mounting plate may not be used to attach the mounting plate to the structure.

**Step 3:** Drill a pilot hole on each of the marked mounting holes using a 5/32" drill bit for the 5/16" lag bolts supplied.

**Step 4:** Using the machine bolts, washers, and nuts supplied, attach the dish mounting base to the mounting plate using the holes 6 and 7 (See Figure 2) in the mounting plate. Hole 5 (See Figure 2) will also be used at this time if it was not marked on the fascia board in step 2. Hand tighten the hardware only at this time.

**Step 5:** Position the dish mounting base and mounting plate assembly over the mounting location. Using the lag bolts and washers supplied, thread the lag bolts into the previously drilled pilot holes and tighten. Tighten the remaining bolts previously installed in step 4 to connect the dish mounting base to the mounting plate. The installation of the Dish Mount FM-400 Fascia Mount Plate is now complete!